


Technical Data Sheet Hygienik Tank

Hygienik	Type	500/25	500/35	825/25	825/35	1000/25	1000/35	1000/50	1500/25	1500/35	1500/50	1500/70	2000/25	2000/35	2000/50	2000/70
Storage Capacity	Litres	500	500	825	825	920	920	920	1500	1500	1500	1500	2000	2000	2000	2000
DxH (inc insulation)	mm	850x1850	850x1850	1000x1950	1000x1950	1000x2150	1000x2150	1000x2150	1150x2350	1150x2350	1150x2350	2260x2350	1300x2450	1300x2450	1300x2450	1300x2450
Tank Diameter	mm	650	650	790	790	790	790	790	950	950	950	950	1100	1100	1100	1100
Tilt Height	mm	1800	1800	1910	1910	2080	2080	2080	2320	2320	2320	2320	2440	2440	2440	2440
Weight	Kg	100	105	115	120	125	130	135	160	165	170	175	200	205	210	215
Single Tap Use Quantity at 45°C* (no buffer)	Litre	480	480	820	820	900	900	900	1400	1400	1400	1400	1800	1800	1800	1800

*based on tank pre-charged to 60°C

Range

Storage tanks of sheet steel with all necessary connections, soft foam insulation with plastic jacket, cover hood for insulation, heat exchanger station with stainless steel plate exchanger, circulation pump, flow window, cut-off valve and connection pipe, insulating cover hood for heat exchange station in modern design (for types 500 and 1000)

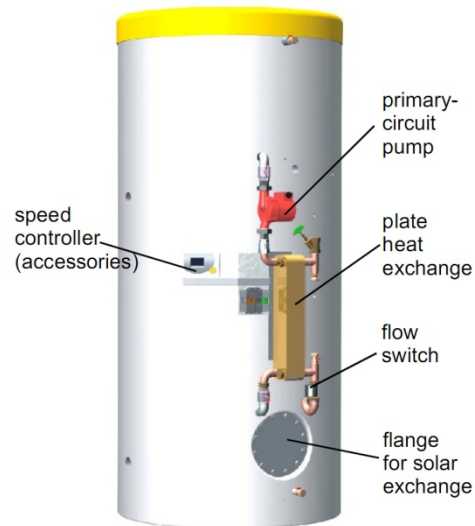

Additional Options

- dial for regulating the plate exchanger pump
- indicator thermometer
- heat exchanger for hot water re-circulation
- electric immersion in various sizes
- layer separation plate
- solar coil (for solar/stove)

